



FASTRAK

Dry Freight & Refrigerated Truck Bodies

Morgan's FASTRAK delivery program is the quickest way of getting your dry freight or refrigerated bodies on the road.





**Need a Truck Body Quick?
FASTRAK
DELIVERS!**

The fastest way to get your Dry Freight truck body is through Morgan's FASTRAK delivery program. Once Morgan receives an order and the chassis, your Dry Freight body can be ready in as few as 7 Days*, now that's fast! Morgan knows how critical it can be when it comes time to add another vehicle to meet the growing demands of business. That's why Morgan developed FASTRAK. No other manufacturer offers a speed-to-market truck body program that delivers Morgan quality and 7 day delivery*.

INTERIOR LINER OPTION PACKAGES

<p>FT-1</p> <ul style="list-style-type: none"> • Sides: 3/8" plywood, full height • Front: 1/2" plywood, full height 	<p>FT-2</p> <ul style="list-style-type: none"> • Sides: 3/8" plywood, 24" high from floor and from ceiling with 3 Apitong slats between, evenly spaced • Front: 1/2" plywood, full height 	<p>FT-3</p> <ul style="list-style-type: none"> • Sides and front: 10-1/2" Apitong scuff with 6 rows Apitong slats 	<p>FT-4</p> <ul style="list-style-type: none"> • No liner

* Lead times may vary, review delivery information with your Morgan Representative or Authorized Morgan Distributor.

** Options may vary by region, please contact you Morgan Representative or Authorized Morgan Distributor for a complete list of options in your area.



STANDARD FEATURES

Subframe: For single axle, 4" I-beam longrails, 3" steel I-beam crossmembers on 16" centers, without wheelpans – 85" and 91" high, 12' through 16' bodies; 12" centers with wheelpans – 18' through 26' bodies and all 97", 103" or 109" high units. Mylar tape between crossmembers and bottom rail.

Floor Type: 1-1/8" laminated hardwood, pre-undercoated rear threshold with drain holes.

Side Walls: Prepainted white aluminum skins with Z-posts on 16" centers.

Front-end Assembly: Aerodynamic design with contoured Poly-Tuff™ corner caps, aluminum 9" top radius and 5" corner radius. Streamlined extruded aluminum body moldings, connectors and rails.

Rear Frame: Includes light protecting header design with rain channel/drip rail diverts water and provides better clearance light protection. Painted steel threshold with drain holes. Curb side and road side grab handles.

Rear Door: Plastic rear overhead door.

Roof Assembly: One-piece crowned .032" aluminum sheet with Morgan's anti-slag, low profile roof bows for improved adhesive seal at all contact points.

Lighting: Per FMVSS-108 specifications, including reflectors. One interior dome light with switch in cab. Easy maintenance, sealed wire harness on exterior lighting.

Warranty: Five-year limited warranty.

SIZES

96" Body Width

Heights	Lengths							
	12'	14'	16'	18'	20'	22'	24'	26'
85"	•	•	•	•	•	•	•	•
91"	•	•	•	•	•	•	•	•
97"			•	•	•	•	•	•
103"				•	•	•	•	•
109"				•	•	•	•	•

102" Body Width

Heights	Lengths				
	18'	20'	22'	24'	26'
97"	•	•	•	•	•
103"	•	•	•	•	•
109"	•	•	•	•	•

(109" Heights West Coast Only)

OPTIONS**

Interior Liner

- Additional Apitong slats (sides and front)
- 10-1/2" Apitong scuff (sides and front)
- 3/8" plywood, 48" high sides
- E-track, recessed or surface-mounted (4 rows max)
- Tie-rings (2 rows max)
- Galvanized steel scuff with 3/4" plywood backing where applicable
- Morgan reinforced front end

Doors

- Side door, single panel, standard height with step & grab handle (only one per body)
- Two panel rear door

Floors & Understructure

- Putty and sand floor screwholes
- 1-3/8" laminated hardwood
- Threshold, 24" steel diamond plate (leading edge routed)
- Additional crossmembers for forklift loading: rear 4' of body
- Polyurethane floor varnish

Roof

- Translucent roof

Lighting

- Domelight with switch at rear
- Additional interior domelights (2 max)
- Recessed taillights
- Boxed taillights
- LED lights

Bumpers and Under-ride

- 6" or 10" wood-filled dock bumpers
- Full-width drop step bumpers
- 5" structural steel under-ride protector with pooched horizontal surface
- 5" under-ride with intermediate step
- Rubber bumper blocks
- Rear stirrup step(s)

Liftgates

- Select tuckaway liftgates; a railgate based on factory location
- Liftgate cutoff switch, cab mounted
- Extra heavy-duty liftgate bumper
- Structural liftgate bumper


Miscellaneous

- Walkramps: standard or ventilated
- Stainless steel front, rear frame, and top radii
- Conspicuity tape
- Backup alarm
- Rear crossview mirror
- Louvered vents
- Rubrail (1) row
- Flatbed pickup
- Placards (4)

Reinforcement Options

- External rear frame gussets*
- Steel hat posts on 16" centers
- Reinforced rear end plate*

*Part of base on larger models.

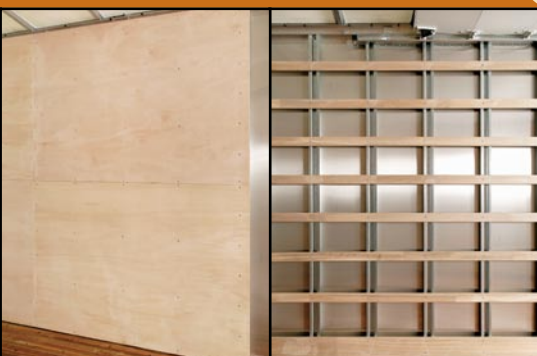

FT-5

- Sides & front: 1/2" plywood, full height

FT-6

- Sides: 10-1/2" Apitong scuff with 7 rows Apitong slats
- Front: 1/2" plywood, full height

21



**Need a Truck Body Quick?
FASTRAK DELIVERS!**

The fastest way to get your Refrigerated truck body is through Morgan's FASTRAK delivery program. Once Morgan receives an order and the chassis, your Refrigerated body can be ready in as few as 21 Days*, now that's fast! Morgan knows how critical it can be when it comes time to add another vehicle to meet the growing demands of business. That's why Morgan developed FASTRAK. No other manufacturer offers a speed-to-market truck body program that delivers Morgan quality and 21 day delivery*.

REFRIGERATED INTERIOR LINER



* Lead times may vary, review delivery information with your Morgan Representative or Authorized Morgan Distributor.

** Options may vary by region, please contact you Morgan Representative or Authorized Morgan Distributor for a complete list



STANDARD FEATURES

Subframe: 4" I-beam longrails, 3" steel I-beam crossmembers on 12" centers. Glassboard subpan over crossmembers. Mylar tape between crossmembers and bottom rail.

Floor Type: 1-1/4" extruded aluminum hat type, welded watertight, including 4 drains with kazoos and built-in 6" high extruded aluminum scuff plate.

Side Walls: Sheet & post, .040" pre-painted white aluminum sheet, with Z posts on 16" centers, 3" foam-in-place urethane insulation and 3/32" seamless glassboard liner.

Front-end Assembly: Radius design with stainless steel corner posts; reinforcement and opening for refrigeration unit, roadside folding steps and grab handle, 3/32" glassboard liner and 4" foam-in-place urethane insulation.

Roof Assembly: .032" one-piece aluminum roof with roof bows on 24" centers, 3" foam-in-place urethane insulation, 3/32" one-piece seamless glassboard liner and one recessed stainless steel domelight with switch in cab.

Rear Frame: Stainless steel with built-in clearance lights protecting header, curb side and road side grab handle.

Rear Door: 1-1/2" insulated overhead door with inside safety release.

Exterior Lights: Per FMVSS-108 specifications, including reflectors. All wiring in loom and sealed wire harness.

Insulation: Urethane, foam-in-place – 3" sides and ceiling, 4" floor and front end.

Warranty: Five-year limited warranty.

SIZES

96" Body Width

Heights	Lengths						
	12'	14'	16'	18'	20'	22'	24'
85"	•	•	•	•	•	•	•
91"	•	•	•	•	•	•	•
97"	•	•	•	•	•	•	•

102" Body Width

Heights	Lengths			
	18'	20'	22'	24'
91"	•	•	•	•
97"	•	•	•	•

OPTIONS**

Floors

- Aluminum inverted "T" anti-skid floor
- Aluminum hat anti-skid floor
- Aluminum inverted "T" ribbed floor
- Tandem understructure
- Four additional crossmembers at rear

Liftgates

- Select tuckaway liftgates; a railgate based on factory location
- Liftgate cutoff switch, cab-mounted

Bumpers

- Rubber bumper blocks
- 6" or 10" wood-filled dock bumpers
- Full-width drop step bumpers
- 5" under-ride with pooched horizontal surface
- 5" under-ride with intermediate step
- Extra heavy-duty liftgate bumper
- Structural liftgate bumper

Lighting

- Additional interior domelights (2 max.)
- Recessed taillights
- LED lights

Interior

- 3 rows, E-track surface mounted on sides only
- Additional 6" scuff (48" max.)
- 4" insulation, sides and ceiling, in lieu of 3"

Doors

- Swing doors (rear): 3-panel full, 2-panel full, 2-panel narrow; with safety release
- Side doors: single panel, various locations — either side (one door per unit) includes step, grab handle and safety release
- Morgan strip curtains for rear or side doors
- 2-1/2" insulated overhead rear door (increased thickness for low-temperature applications)

Miscellaneous

- Walkramps: Standard or ventilated
- Reinforcement for front wall mounted 2-piece refrigeration unit
- Refrigeration unit service platform
- Refrigeration unit supplied and/or installed by Morgan*
- Wood crusher strips in floor – last 4' of body
- Flatbed pickup
- Mud flaps shipped loose in body for flatbed pickup
- Conspicuity striping reflective tape
- Backup alarm
- Customer finish (includes full mounting and temporary underride)
- Rear crossview mirror

*Additional lead time.

FASTRAK OPTIONS



Translucent roof shown with (2) additional domelights



Various bumpers and under-ride configurations



24" steel diamond plate threshold, shown with optional polyurethane floor varnish



Plywood interior liner, shown with tie rings



Rub rail




Louvered vents




Refrigeration unit service platforms (body mounted platform shown)




Various bumpers and under-ride configurations

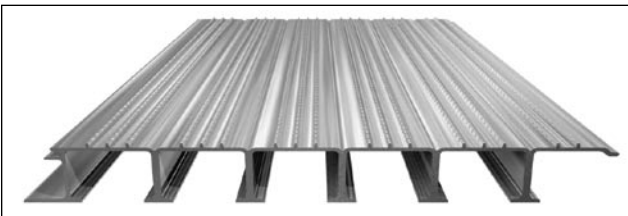

Aluminum inverted "T" anti-skid floor

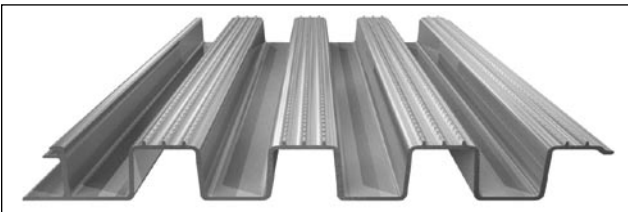

Aluminum hat anti-skid floor

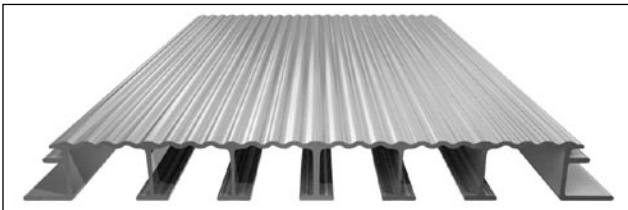

Aluminum inverted "T" ribbed floor



35 Thousand Oaks Blvd.
PO Box 588
Morgantown, PA 19543
1-800-666-7426
www.morgancorp.com

YOUR AUTHORIZED MORGAN DISTRIBUTOR:

© 2007 Morgan Corporation

At Morgan Corporation, our quest for quality and safety is ongoing and therefore the specifications on the products described herein may vary over time.
Please contact us or your Authorized Morgan Distributor for the latest product information and available safety features and options.